


DE3000 BATTERY CELL SIMULATOR

- 1U rack-mountable instrument designed to meet all the testing requirements of battery-sensitive products
- 12 independent battery simulation channels
- Ethernet, USB, EtherCAT, and high-speed CAN control interfaces are available for remote control and configuration
- Up to 5V and 500mA source and sink capability per channel
- Auxiliary analog and digital I/O Connections
- 1600 VDC Isolation
- Easy control via our user-friendly DEICO Battery Simulator Control Panel
- Fast integration into existing software environments with the provided API library
- Optimized for HIL test system usage

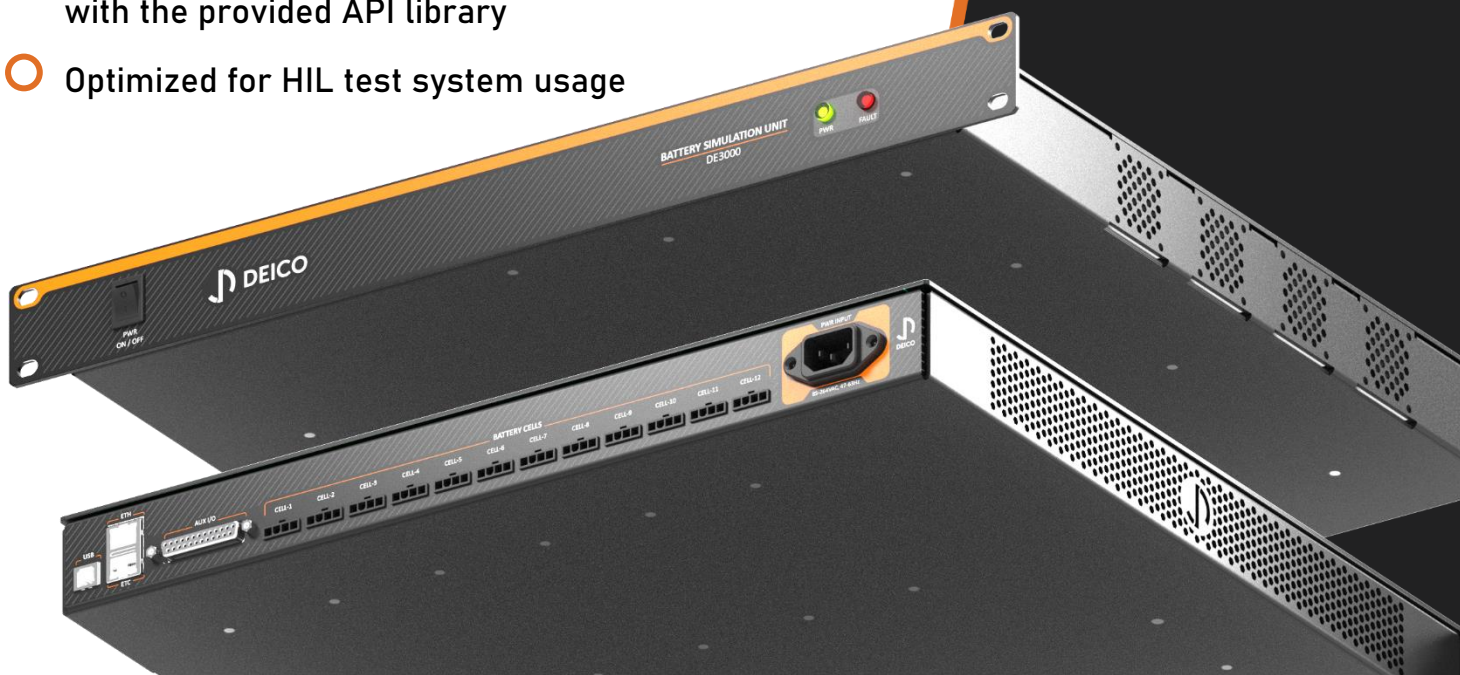

✉ support@deico.com.tr
☎ +90 312 395 68 44
🌐 www.deico.com.tr

 **DEICO**